


C120 Combine Harvester



JOHN DEERE



C120 Combine Harvester

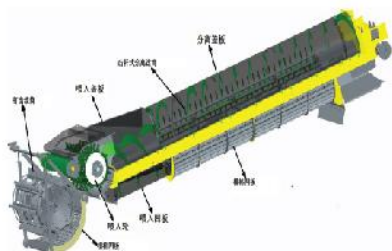

The CTS technology with fully tined Rotor provides strong threshing and separation capacity, as well as lower impact to grain and excellent performance for rice harvesting



The combine features a high-strength, two-piece 1000 Series front axle to increase maintainability.



TC120 Combines feature a John Deere 4045PTE engine, Turbo charged water-cooled engine with the power of 121kW, this engine delivers constant, reliable power, keeping the combine productive in all harvesting conditions.



Single-tilt steering column with instrument panel & display allowing the controls to move back or forth with operator to maximize comfort and productivity.

Model	C120
Cutting width, ft	15 Or 18
Drive wheel tread, m	2,6
Steering wheel tread, m	2,6
Threshing cylinder type	Rasp-bar and spike tooth
Cylinder width by diameter, mm	1020×610
Separation type	Single-cylinder tine separator
Separation area, m2	1,97
Cleaning type	Fan and chaffer
Cleaning area, m2	3,4
Grain tank capacity, m3	4,2
Engine power, kW/PS	121/165
Engine type	Deere 4045HYC08
Engine Emission Level	Stage III
Dimension (length by width by height), m	Transport: 7.23 by 3.15 by 3.80 without header
Total weight, kg	9180 without header but with straw chopper
Ground speed, km/h	Forward: 1.05 to 19.7 , Reverse: 2.40 to 5.55

For more information, please contact our authorized dealer or nearest area office.



PT WAHANA INTI SELARAS
 Operational Office : Green Sedayu Bizpark, Blok GS 3/38,
 Jl. Cakung Cilincing Timur Raya KM 2, Jakarta 13910, INDONESIA
 Phone : (+6221) 2983 2045, 2983 2113
 Email : admin.sales@wiselgroup.indomobil.co.id
 Website : www.johndeere.indomobil.com

Authorized Dealer for John Deere Asia Pte Limited
 Tractor - Farm Equipment